

09/2022



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

details needed for main valve

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- type of actuation

details needed for pneumatic actuation

- nominal voltage
- type of protection
- actuation pressure range min/max
- pilot valve type

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application. To avoid hydraulic shocks in pipelines, the flow velocities must be taken into account when designing valves for liquids.


■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

2/2-way valve


pressure range
orifice
connection
function

externally controlled

PN 0-40 bar
 DN 8 mm
 thread
 valve normally closed
 symbol **NC**



valve normally open
 symbol **NO**



operating principle

body material

pressure balanced, with spring return

- | | |
|---------|---|
| ① brass | ② |
| ③ | ⑤ |
| ④ | ⑥ |

valve seat

seal materials

synthetic materials on metal

NBR, FPM, PE PU, PTFE

ports

function
pressure range

CFM threads G 3/8

NC NO
 bar 0-40

Kv value
vacuum
pressure-vacuum

m³/h 1.6
 leak rate < 10⁻⁶ mbar•L•s⁻¹
 P₁ ⇌ P₂

back pressure
media

P₂ > P₁ emulsion - oil - neutral gases available (max. 16 bar)
other medias upon request

abrasive media
damping

opening
 closing

flow direction
switching cycles
switching time

A ⇌ B as marked
 1/min 400
 ms opening 70
 closing 80
 °C direct mounted pilot valve 60 > 60 °C upon request
 °C direct mounted pilot valve 50 > 50 °C upon request

media temperature
ambient temperature
flush ports

temperature range max 70°C

leak ports
limit switches
manual override
approvals
mounting
weight
additional equipment

via pilot valve
 mounting holes
 kg see table

nominal voltage

power consumption

protection
energized duty rating
connection
optional
additional equipment
max. temperature

electrical specifications

U _n	DC 24 V	special voltage upon request
U _n	AC 230 V 50 Hz	special voltage upon request
DC	4.8 W	2.5 W [actuation pressure range 4-7 bar]
AC	pick up 11.0 VA holding 8.5 VA	
IP65 (P54)	acc. DIN 40050	
ED	100%	
	plug acc. DIN EN 175301-803 form B, 2 positions x180° / wire diameter 6-8 mm	
M12x1	connector acc. DESINA	connector acc. VDMA
	illuminated plug with varistor	
media	60°C	
ambient	50°C	
E Ex e II T5	nominal voltage U _n	DC 24 V 3.25 W
	power consumption	AC 230 V 50 Hz 2.90 W

explosion proof

actuation pressure range
air consumption
cycle speed
control
pilot valve interface
actuator ports

pneumatic specifications

bar	4-8
cm ³ /stroke	1.2
	via 3/2 way pilot valve
	co-ax CNOMO upon request
2/4	G 1/8


actuation pressure range
control
actuator ports
by media

hydraulic specifications


options

coax® data sheet - valve manifold


type CFM 08

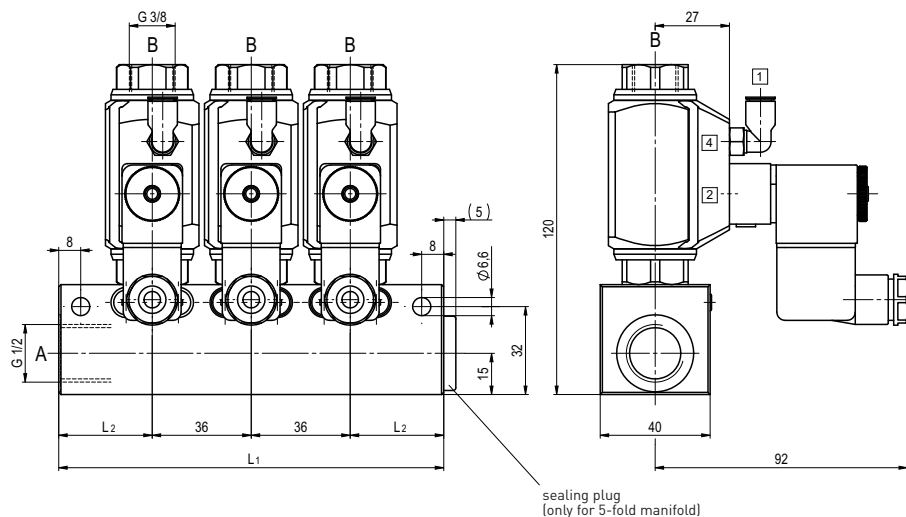


constructive length	L1	L2	weight
2-station	100	32	1,0
3-station	140	34	1,4
4-station	180	36	1,8
5-station	210	33	2,2

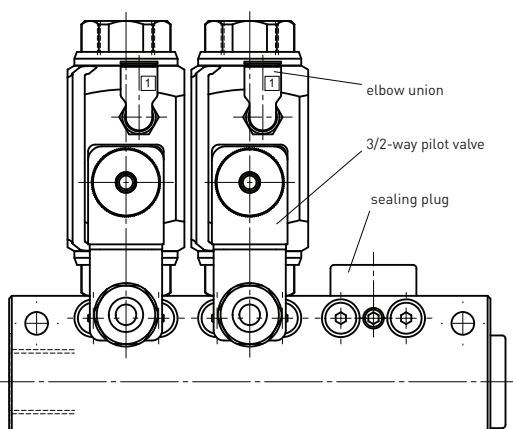

pneumatic actuation (5/2 separately)



3/2-way pilot valve
flow rate 60 l/min
pressure range 3-10 bar



5/2 way pilot valve
flow rate 700 l/min
pressure range 3-10 bar G 1/8