


01/2023

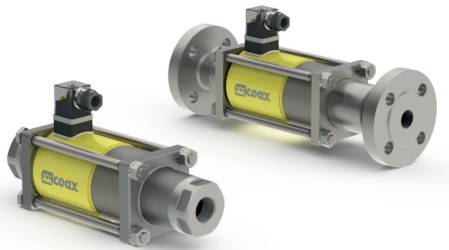

⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

details needed

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application. To avoid hydraulic shocks in pipelines, the flow velocities must be taken into account when designing valves for liquids.

■ specifications not highlighted are standard
■ specifications highlighted in grey are optional

2/2-way valve

pressure range

orifice

connection

function

direct acting

PN 0-40 bar


DN 20 mm

thread/flange

valve

normally closed


symbol **NC**



valve

normally open

symbol **NO**



operating principle

pressure balanced, with spring return

body material

Ⓢ DVGW (steel, nickel plated)

valve seat

synthetic materials on metal

seal materials

FPM, PTFE

ports

MK threads G 3/4 - G 1 1/4
FK flanges PN 40

function

NC

options

NO

pressure range

bar 0-40

Kv value

m³/h 8,4

vacuum

leak rate

pressure-vacuum

P₁ ↔ P₂

back pressure

P₂ > P₁

media

combustible gases according G 260

abrasive media

damping

flow direction

opening

switching cycles

closing

switching time

A ↔ B as marked

1/min 150

ms opening 110

closing 110

media temperature

°C DC: -15 to +80

AC: -15 to +80

ambient temperature

°C DC: -15 to +80

AC: -15 to +80

limit switches

inductive

manual override

available (NC)

approvals

DVGW DIN EN 16678:2016

mounting

kg

weight

MK 5,5 FK 7,5

additional equipment

inductive

electrical specifications

U_n DC 24 V +5%/-10%

U_n AC 230 V +5%/-10% 40-60 Hz

DC direct-current magnet

AC direct-current magnet with integrated rectifier

H 180°C

IP65

ED 100%

plug acc. DIN EN 175301-803 form A, 4 positions x90° / wire diameter 6-8 mm

illuminated plug with varistor

N-coil

H-coil DC 24 V 2,64 A

AC 230 V 40-60 Hz 0,30 A

E Ex e II T4 nominal voltage U_n V-DC 24 48 98 110 200 220

nominal current I_n A 1,21 0,66 0,29 0,24 0,14 0,12

media temperature °C -15 to +40

ambient temperature °C -15 to +40

AC connection with separate rectifier

inductive (B) normally open-PNP

Namur circuit amplifier

nominal voltage

actuation

insulating rating

protection

energized duty rating

connection

optional

additional equipment

current consumption

explosion proof (NC 0-16 bar)



limit switches

coax® data sheet - coaxial valve

type MK 20 DVGW

FK 20 DVGW

function: **NC**
closed when not energized

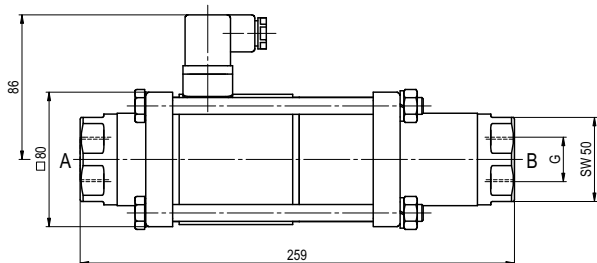

function: **NO**
open when not energized

