

03/2022



**⚠** Above stated body materials refer to the valve port connections that get in contact with the media only!

**details needed for main valve**

- orifice
- port
- pressure regulating range
- flow rate
- media
- media temperature
- ambient temperature

**details needed for pneumatic actuation**

- nominal voltage
- type of protection
- actuation pressure range min/max

**⚠** The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.


**⚠** If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application. To avoid hydraulic shocks in pipelines, the flow velocities must be taken into account when designing valves for liquids.

**control valve manual**

**pressure range**  
**orifice**  
**connection**  
**function**

**externally controlled**

PN 0-200 bar  
 DN 8 mm  
 thread  
 stepless pressure regulation



**operating principle**

**body material**

externally controlled with spring return

- |         |   |
|---------|---|
| ① brass | ④ |
| ②       | ⑤ |
| ③       | ⑥ |

**valve seat**

**seal materials**

synthetic materials on metal

NBR FPM

**ports**

**function**  
**pressure regulation range**  
**flow rate**  
**media**

**general specifications**

HPI threads G 3/8  
 stepless pressure regulation  
 bar 10-200  
 m³/h max. 1,3  
 gaseous - liquid

**options**

**abrasive media**

**flow direction**

**settling time**

**media temperature**

**ambient temperature**

**approvals**

**mounting**

**weight**

**additional equipment**

A ⇨ B as marked  
 ms < 100  
 °C 0 to +60  
 °C 0 to +50

kg 3,6

**electrical specifications**

U<sub>n</sub> DC 24 V  
 U<sub>n</sub> AC 230 V 50 Hz  
 DC 4,8 W  
 AC pick up 11,0 VA holding 8,5 VA  
 IP65 (P54) acc. DIN 40050  
 ED 100%  
 plug acc. DIN EN 175301-803 form B, 3 positions x90° / wire diameter 6-8 mm  
 M12x1 connector acc. DESINA  
 illuminated plug with varistor  
 media 60°C  
 ambient 50°C  
 E Ex e II T5 nominal voltage U<sub>n</sub>  
 power consumption

**options**

special voltage upon request  
 special voltage upon request  
 2,5 W

connector acc. VDMA

DC 24 V	3,25 W
AC 230 V 50 Hz	2,90 W

**pneumatic specifications**



bar see actuation pressure-diagram  
 DIN ISO 8573-1 grade of compressed air quality 5/4/3  
 via 3/2 way pilot valve for shutt-off  
 1 G 1/8

**options**

■ specifications not highlighted are standard  
 ■ specifications highlighted in grey are optional

# coax® data sheet - pressure reduction valve

type HPI 08

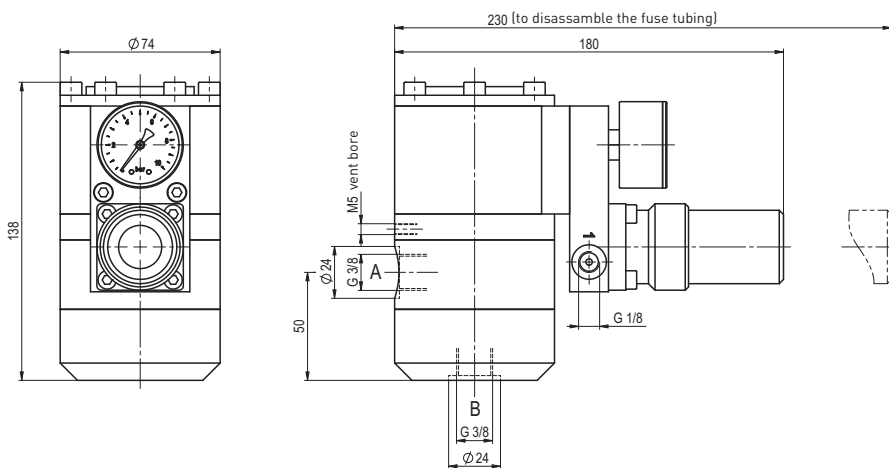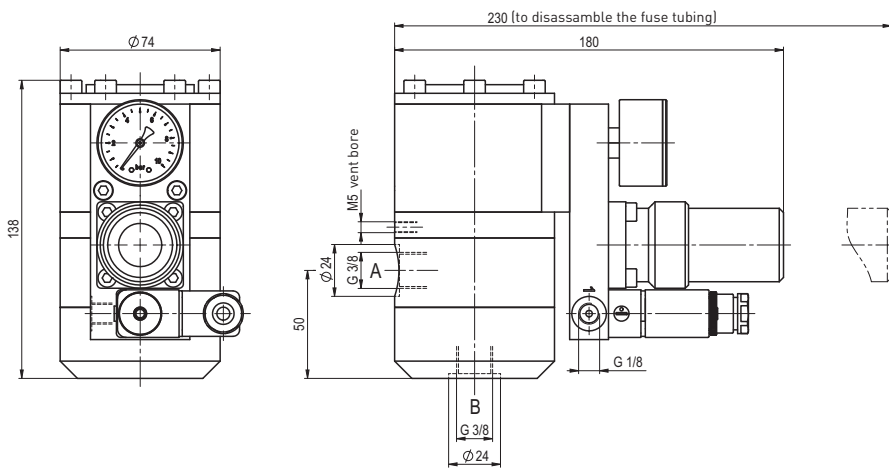

## actuation pressure-diagram

