

08/2021



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

details needed

- orifice
- port
- function NC
- operating pressure
- inlet pressure at A, B or C
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.


specifications not highlighted are standard
 specifications highlighted in grey are optional

3/2 way valve

pressure range
orifice
connection
function

direct acting

PN 0-40 bar
 DN 25 mm
 flange
 valve normally closed (A ► B)
 symbol **NC**



design

body materials

pressure balanced, with spring return, intersecting switch-over
 Ⓢ TÜV (steel, galvanized)

valve seat

seal materials

synthetic resin on metal
 FPM, PTFE

ports

function
pressure range

Kv value
vacuum
pressure-vacuum
back pressure
media

abrasive media
damping

flow direction
switching cycles
switching time

media temperature
ambient temperature

limit switches
manual override
approvals
mounting
weight
additional equipment

nominal voltage

actuation

insulating rating
protection
energized duty rating
connection

optional
additional equipment
current consumption

explosion proof

limit switches

general specifications

FK	flanges PN 40
bar	NC 0-40 A ⇒ B max. 40 / B ⇒ A max. 16 / A ⇒ C max. 40 / C ⇒ A max. 40
m³/h	11,2
leak rate	
P ₁ ⇔ P ₂	
P ₂ > P ₁	see pressure range liquid fuels
opening	
closing	see pressure range
1/min	130
ms	opening 130 closing 130
°C	DC: -10 to +140 AC: -10 to +140
°C	DC: -10 to +60 AC: -10 to +60

options

	mechanical
TÜV	DIN EN ISO 23553-1 + E DIN 32725
	mounting brackets
kg	FK 12,0

electrical specifications

U _n	DC 24 V +5%/-10%
U _n	AC 230 V +5%/-10% 40-60 Hz
DC	direct-current magnet
AC	direct-current magnet with separate rectifier

options




H	180°C
IP65	
ED	100%
M16x1,5	terminal box
N-coil	
H-coil	DC 24 V 2,66 A AC 230 V 40-60 Hz 0,36 A

mechanical **single pole double throw-SPDT**

coax® data sheet - coaxial valve

type FK 25 DR TÜV

function: **NC**
 closed when not energized (A ► B)

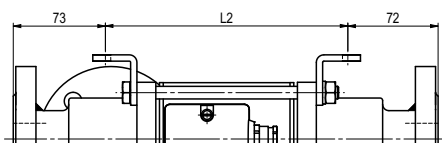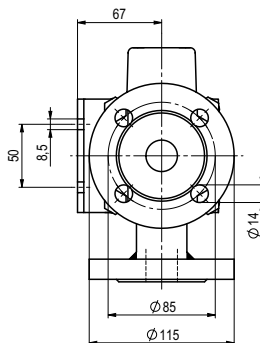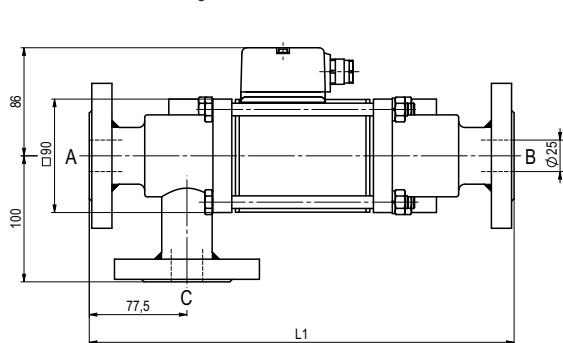

constructive length	L1	L2
standard	337	192