

03/2022



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

details needed

- orifice
- port
- function NC
- operating pressure
- inlet pressure at A, B or C
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application. To avoid hydraulic shocks in pipelines, the flow velocities must be taken into account when designing valves for liquids.


specifications not highlighted are standard
 specifications highlighted in grey are optional

3/2 way valve

pressure range
orifice
connection
function

direct acting

PN 0-40 bar
 DN 25 mm
 flange
 valve normally closed (A ► B)
 symbol **NC**



operating principle
body material

pressure balanced, with spring return, intersecting switch-over
 Ⓢ TÜV (steel, galvanized)

valve seat
seal materials

synthetic materials on metal
 FPM, PTFE

ports
function
pressure range
Kv value
vacuum
pressure-vacuum
back pressure
media
abrasive media
damping
flow direction
switching cycles
switching time
media temperature
ambient temperature
limit switches
manual override
approvals
mounting
weight
additional equipment

general specifications

FK	flanges PN 40
bar	NC 0-40 A ⇒ B max. 40 / B ⇒ A max. 16 / A ⇒ C max. 40 / C ⇒ A max. 40
m³/h	11,2
leak rate	
P ₁ ⇔ P ₂	
P ₂ > P ₁	see pressure range
media	liquid fuels
opening	
closing	see pressure range
1/min	130
ms	opening 130 closing 130
°C	DC: -10 to +140 AC: -10 to +140
°C	DC: -10 to +60 AC: -10 to +60

options

	mechanical
TÜV	DIN EN ISO 23553-1 + E DIN 32725
	mounting brackets
kg	FK 12,0

electrical specifications

U _n	DC 24 V +5%/-10%
U _n	AC 230 V +5%/-10% 40-60 Hz
DC	direct-current magnet
AC	direct-current magnet with separate rectifier

options

H	180°C
IP65	
ED	100%
M16x1,5	terminal box

nominal voltage
actuation
insulating rating
protection
energized duty rating
connection
optional
additional equipment
current consumption
explosion proof
limit switches




N-coil	
H-coil	DC 24 V 2,96 A AC 230 V 40-60 Hz 0,33 A

	mechanical	single pole double throw-SPDT
--	------------	-------------------------------

coax® data sheet - coaxial valve

type FK 25 DR TÜV

function: **NC**
 closed when not energized (A ► B)

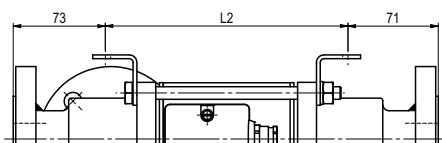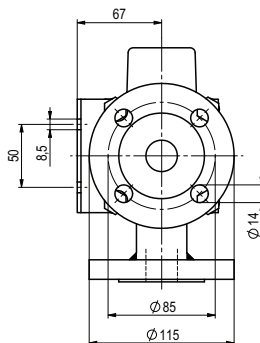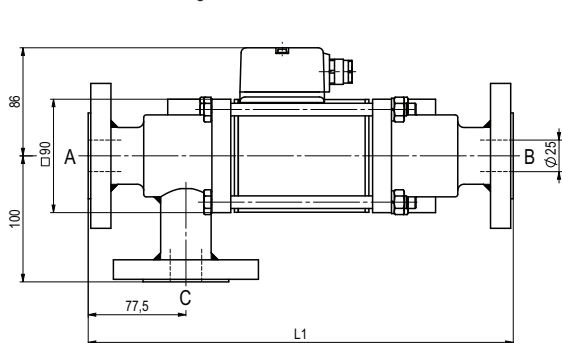

constructive length	L1	L2
standard	337	192