


08/2021

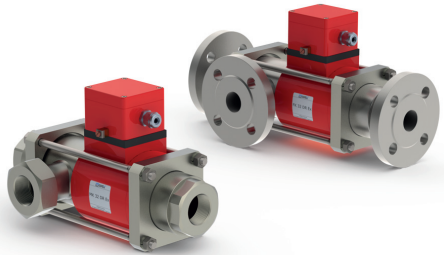

! Above stated body materials refer to the valve port connections that get in contact with the media only!

details needed

- orifice
- port
- function NC/NO
- operating pressure
- inlet pressure at A, B or C
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

! The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

! If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

3/2 way valve

pressure range

orifice

connection

function

direct acting

PN 0-40 bar


DN 32 mm

thread/flange

valve

normally closed (A ► B)


symbol **NC**



valve

normally open (A ► B)

symbol **NO**



design

body materials

pressure balanced, with spring return, intersecting switch-over

- | | |
|------------------------|----------------------------|
| ① | ② steel galvanized |
| ③ | ⑤ without non-ferr. Metals |
| ④ steel, nickel plated | ⑥ stainless steel |

valve seat

synthetic resin on metal

seal materials

NBR PTFE, FPM, CR, EPDM

ports

general specifications

options

MK	threads G 1 1/4 - G 1 1/2	special threads
FK	flanges PN 16 / 40	special flanges
	NC	NO
bar	0-16 / 0-40	
	A ⇒ B max. 40 / B ⇒ A max. 16 / A ⇒ C max. 40 / C ⇒ A max. 16	
m ³ /h	14,1 [A ⇒ B] 8,9 [A ⇒ C]	
leak rate		< 10 ⁻⁶ mbar•L•s ⁻¹
P ₁ ⇒ P ₂		upon request
P ₂ > P ₁	see pressure range	
	gaseous - liquid - highly viscous - gelatinous - contaminated	upon request
opening		
closing		
	see pressure range	
1/min	120	
ms	opening 440	
	closing 250	
°C	DC: -20 to +40	
	AC: -20 to +40	
°C	DC: -20 to +40	
	AC: -20 to +40	
		inductive
		available
		LR/GL/WAZ
		mounting brackets
kg	MK 18,0 FK 22,0	
		upon request

nominal voltage

electrical specifications

options

U _n	DC 24 V +5%/-10%	special voltage upon request
U _n	AC 230 V +5%/-10% 40-60 Hz	special voltage upon request
DC	direct-current magnet	
AC	direct-current magnet with separate rectifier outside of the explosion-proof area	sand sealed rectifier
H	180°C	
IP65		
ED	100%	
M16x1,5	terminal box	
U _n	V-DC 24 200	20 48 98 110 210 220 230
I _n	A 2,05 0,29	2,72 1,07 0,54 0,48 0,25 0,25 0,21

actuation

insulating rating

protection

energized duty rating

connection

optional

additional equipment

current consumption

explosion proof

II 2 G Ex mb e II T4
II 2 D Ex tD A21 IP65 T130 °C
PTB 03 ATEX 2051 X

limit switches


inductive NAMUR circuit amplifier

■ specifications not highlighted are standard
■ specifications highlighted in grey are optional

coax® data sheet - coaxial valve

type MK 32 DR Ex
FK 32 DR Ex

function: **NC**
closed when not energized (A ► B)

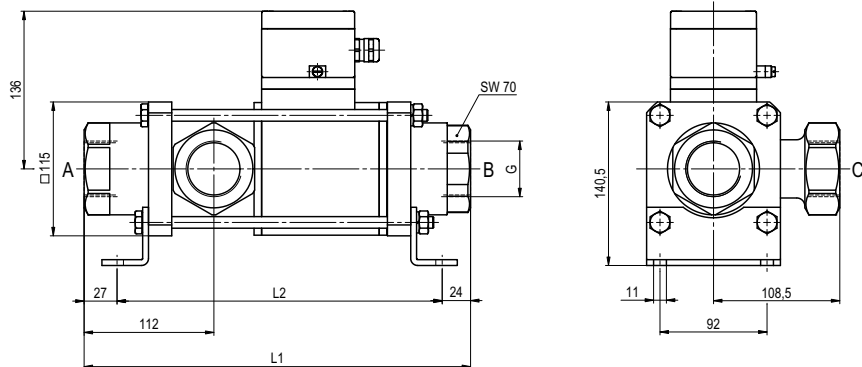

constructive length	L1	L2	L3
standard	332	281	394
with inductive limit switches	373	322	435
with manual override / inductive limit switches	373	322	435

flanges PN	DIN	ØD	Øk	Ød
16	EN 1092-1	140	100	18
40	EN 1092-2	140	100	18

function: **NO**
open when not energized (A ► B)

