

03/2022



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

details needed

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application. To avoid hydraulic shocks in pipelines, the flow velocities must be taken into account when designing valves for liquids.

specifications not highlighted are standard
 specifications highlighted in grey are optional

2/2-way valve

pressure range

orifice

connection

function

direct acting

PN 0-16 bar


DN 80 mm

flange

valve

normally closed


symbol **NC**



valve

normally open

symbol **NO**



operating principle

body material

pressure balanced, with spring return

① aluminium

② steel galvanized

③

⑤ without non-ferr. Metals

④ steel, nickel plated

⑥ stainless steel

valve seat

synthetic materials on metal

seal materials

NBR

PTFE, FPM, EPDM

ports

FK

flanges PN 16

options

special flanges

function

NC

NO

pressure range

0-16

> 16 bar upon request

Kv value

m³/h 92,0

vacuum

leak rate

< 10⁻⁴ mbar•L•s⁻¹

pressure-vacuum

P₁ ↔ P₂

upon request

back pressure

P₂ > P₁

available (max. 5 bar)

media

gaseous - liquid - highly viscous -

gelatinous - contaminated

upon request

abrasive media

damping

opening

upon request

closing

upon request

flow direction

A ↔ B

as marked

bi-directional (max. 5 bar)

switching cycles

1/min

20

switching time

ms

opening 600

closing 800

media temperature

°C

DC: -20 to +80

AC: -20 to +80

ambient temperature

°C

DC: -20 to +80

AC: -20 to +80

limit switches

inductive

manual override

LR/DNV/WAZ

approvals

mounting

weight

kg

FK 38,0

additional equipment

upon request

nominal voltage

U_n

DC 24 V +5%/-10%

special voltage upon request

U_n

AC 230 V +5%/-10% 40-60 Hz

special voltage upon request

actuation

DC

direct-current magnet

AC

direct-current magnet with integrated rectifier

insulating rating

H

180°C

protection

IP65

energized duty rating

ED

100%

connection

plug acc. DIN EN 175301-803 form A, 4 terminal box M16x1,5 positions x90° / wire diameter 6-8 mm

optional

additional equipment

illuminated plug with varistor

current consumption

N-coil

DC 24 V 4,36 A

AC 230 V 40-60 Hz 0,63 A

H-coil

AC 230 V 40-60 Hz 0,76 A

terminal box M16x1,5

Ⓜ II 3G Ex nA IIC T3 Ta -20...+80°C Gc

Ⓜ II 3D Ex tc IIIC T195°C Ta -20...+80°C Dc

Ⓜ II 3G Ex h IIC T3 Gc

Ⓜ II 3D Ex h IIIC T195°C Dc

limit switches

inductive (I)

normally open-PNP


inductive (B)

normally open-PNP

coax® data sheet - coaxial valve

type FK 80

function: **NC**
closed when not energized

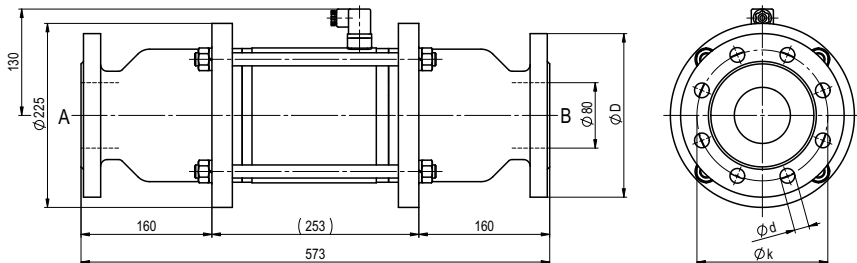

flanges PN	DIN	$\varnothing D$	$\varnothing k$	$\varnothing d$
16	EN 1092-1	200	160	18

function: **NO**
open when not energized

