


coaxial valve

type **RMK 15** **RFK 15**



2/2 way valve direct acting
pressure range PN 0-100 bar
orifice DN 15 mm
connection thread/flange
function valve
 normally closed
 symbol **NC**



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

design pressure balanced, with spring return
body materials ① brass ② steel galvanized
 ③ brass, nickel plated ⑤ without non-ferr. Metals
 ④ steel, nickel plated ⑥ stainless steel
 ⑦ aluminium
valve seat synthetic resin on metal
seal materials FPM, PTFE, EPDM

details needed

- orifice
- port
- function NC
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- description of the operating mode

general specifications

options

ports	RMK threads G 3/8 - G 3/4	special threads
	RFK flanges PN 16 / 40 / 100	special flanges
function	NC	
pressure range	bar 0-16 / 0-40 / 0-64	> 64 bar upon request
Kv value	m³/h 3,9 - Qmax. 80 l/min	
vacuum	leak rate	< 10 ⁻⁶ mbar•l•s ⁻¹
pressure-vacuum	P ₁ ↔ P ₂	upon request
back pressure	P ₂ > P ₁	available (max. 16 bar)
media	emulsion - oil	other medias upon request
abrasive media		upon request
damping	opening refer to switching times	
	closing refer to switching times	
flow direction	A ↔ B as marked	bi-directional (max. 16 bar)
switching cycles	1/min	
switching time	ms	selectable, ca. 200, 400, 800, 1000 ms
media temperature	°C DC: -20 to +100	
ambient temperature	°C DC: -20 to +80	
limit switches	integrated	
manual override		WAZ
approvals		mounting brackets
mounting		
weight	kg RMK 3,8 RFK 5,0	
additional equipment		

electrical specifications

options

nominal voltage	U _n DC 24 V	
actuation	DC direct-current magnet	electronic control system with connectors integrated in the terminal box
insulating rating	H 180°C	
protection	IP65	
energized duty rating	ED 100%	
connection	M16x1,5 terminal box	
optional additional equipment	M12x1	connector (refer to operating manual)
current consumption		LED indicator on the terminal box (refer to operating manual) typical current consumption approx. 0,3 A average power consumption approx. 7,5 W short-term peak current (<0,5 s) 4 A max. power consumption approx. 100 W
operating mode	on - off	with damping -> 24 V digital control signal necessary
limit switches	24 V digital signal tapped at terminal	(refer to operating manual)



⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

type **RMK 15**

function: **NC**
closed when not energized

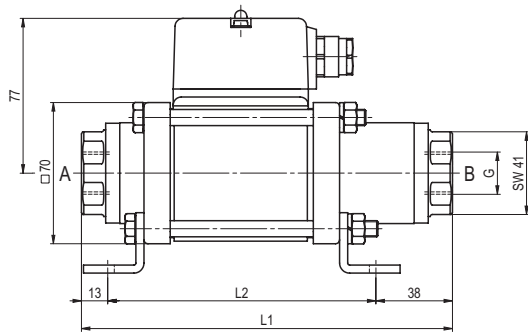

constructive length	L1	L2	L3
standard	184	133	241

flanges PN	DIN	ØD	Øk	Ød
16	EN 1092-1	95	65	14
40	EN 1092-1	95	65	14
100	EN 1092-1	105	75	14

type **RFK 15**

function: **NC**
closed when not energized

