


coaxial valve

type **RMK 25** **RFK 25**



2/2 way valve **direct acting**
pressure range PN 0-100 bar
orifice DN 25 mm
connection thread/flange
function valve
 normally closed
 symbol **NC**



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

design pressure balanced, with spring return
body materials ① brass ② steel galvanized
 ③ brass, nickel plated ⑤ without non-ferr. Metals
 ④ steel, nickel plated ⑥ stainless steel
 ⑦ aluminium
valve seat synthetic resin on metal
seal materials FPM, PTFE, EPDM

details needed

- orifice
- port
- function NC
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- description of the operating mode

general specifications

options

ports	RMK threads G 1 - G 1 1/2	special threads
	RFK flanges PN 16 / 40 / 100	special flanges
function	NC	
pressure range	bar 0-16 / 0-40 / 0-64	> 64 bar upon request
Kv value	m ³ /h 11,2 - Qmax. 187 l/min	
vacuum	leak rate	< 10 ⁻⁶ mbar•l/s ⁻¹
pressure-vacuum	P ₁ ↔ P ₂	upon request
back pressure	P ₂ > P ₁	available (max. 16 bar)
media	emulsion - oil	other medias upon request
abrasive media		upon request
damping	opening refer to switching times	
	closing refer to switching times	
flow direction	A ↔ B as marked	bi-directional (max. 16 bar)
switching cycles	1/min	
switching time	ms	selectable, ca. 200, 400, 800, 1000 ms
media temperature	°C	DC: -20 to +100
ambient temperature	°C	DC: -20 to +80
limit switches		integrated
manual override		
approvals		WAZ
mounting		mounting brackets
weight	kg	RMK 8,0 RFK 10,5
additional equipment		

electrical specifications

options

nominal voltage	U _n	DC 24 V
actuation	DC	direct-current magnet electronic control system with connectors integrated in the terminal box
insulating rating	H	180°C
protection	IP65	
energized duty rating	ED	100%
connection	M16x1,5	terminal box
optional additional equipment	M12x1	connector
current consumption		LED indicator on the terminal box (refer to operating manual) typical current consumption approx. 0,5 A average power consumption approx. 12 W short-term peak current (<0,5 s) 4,5 A max. power consumption approx. 110 W
operating mode	on - off	with damping -> 24 V digital control signal necessary
limit switches		24 V digital signal (refer to operating manual) tapped at terminal



⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

type **RMK 25**

function: **NC**
closed when not energized

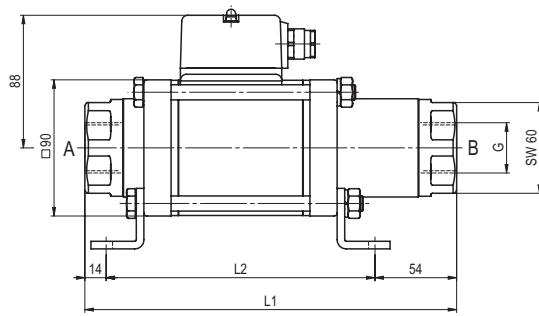

constructive length	L1	L2	L3
standard	246	178	302

flanges PN	DIN	ØD	Øk	Ød
16	EN 1092-1	115	85	14
40	EN 1092-1	115	85	14
100	EN 1092-1	140	100	18

type **RFK 25**

function: **NC**
closed when not energized

