




# module

## type MK 10 - MK 25



**2/2-way valve** direct acting  
**pressure range** PN 0-100 bar  
**orifice** DN 10-25 mm  
**connection** thread  
**function** valve normally closed symbol **NC**  
 valve normally open symbol **NO**




 Above stated body materials refer to the valve port connections that get in contact with the media only!


**details needed**

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature

**general specifications**

type	MK 10	MK 15	MK 20	MK 25
<b>port thread valve</b>	G 1/4 - 3/4	3/8 - 3/4	3/4 - 1 1/4	1 - 1 1/2
<b>port thread module</b>	G 1	1	1 1/4	1 1/2
<b>function</b>	NC / NO	NC / NO	NC / NO	NC / NO
<b>pressure range</b>	bar 0-16 / 40 / 64 / 100	0-16 / 40 / 64 / 100	0-16 / 40 / 64 / 100	0-16 / 40 / 64 / 100
<b>orifice</b>	DN 10	15	20	25
<b>media</b>	gaseous - liquid - contaminated			
<b>media temperature</b>	°C -20 to +120	-20 to +160	-20 to +160	-20 to +160
<b>switching time</b>	ms opening 25 closing 25	opening 80 closing 80	opening 110 closing 110	opening 130 closing 130
<b>body materials valve</b>	① brass	brass	brass	brass
	② aluminium	aluminium	aluminium	aluminium
	③ brass	steel, galvanized	steel, galvanized	steel, galvanized
	nickel plated	nickel plated	nickel plated	nickel plated
	④ steel	steel	steel	steel
		nickel plated	nickel plated	nickel plated
	⑤			
<b>body materials module</b>	⑥ stainless steel	stainless steel	stainless steel	stainless steel
	⑦ aluminium	aluminium	aluminium	aluminium
	⑧ stainless steel	stainless steel		
<b>seal materials</b>	NBR, PTFE, FPM, CR, EPDM			
<b>valve seat</b>	synthetic resin on metal			
<b>design</b>	pressure balanced, with spring return			

 The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

 If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard  
 ■ specifications highlighted in grey are optional

# type module MK 10 - MK 25

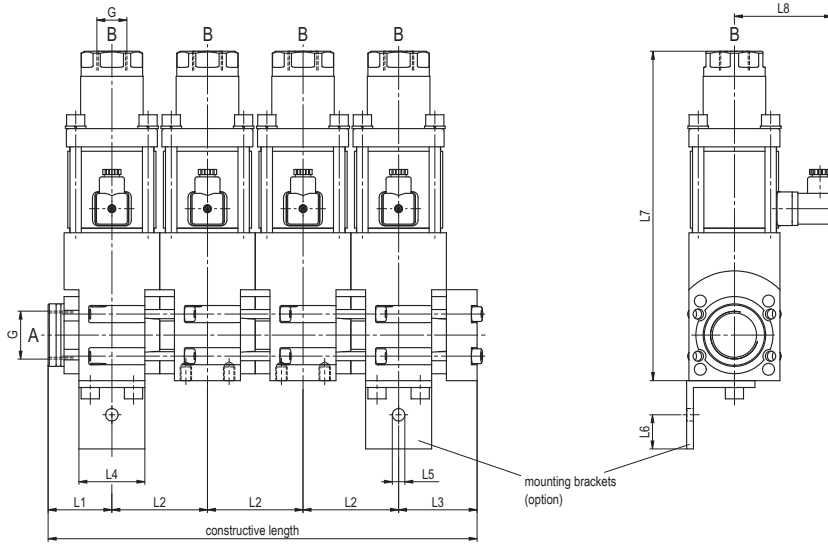


chart with dimensions

type	L1	L2	L3	L4	L5	L6	L7	L8	L9
MK 10	36,5	53	38,5	38	Ø8,5	20	186	72	20
MK 15	46	72	64	52	Ø9	30	247	81	20
MK 20	56	84	69	58	Ø11	30	290	86	30
MK 25	61	94	84	68	Ø11	30	339	92	30

chart with overall length

type	1-station	2-station	3-station	4-station	5-station	6-station	7-station	8-station
MK 10	75	128	181	234	287	340	393	446
MK 15	110	182	254	326	398	470	542	614
MK 20	125	209	293	377	461	545	629	713
MK 25	145	239	333	427	521	615	709	803

