


pressure reduction valve

type SPP-3 15 PC



control valve proportional
pressure range PN 0-100 bar
orifice DN 15 mm
connection thread/cartridge
function stepless
 pressure regulation
 bypass version



Above stated body materials refer to the valve port connections that get in contact with the media only!

design externally controlled with spring return
body materials ① aluminium ④
 ① brass ⑤
 ③ ⑥ stainless steel
valve seat synthetic resin on metal / metal on metal
seal materials EPDM, PU, HNBR FPM

details needed for main valve

- orifice
- port
- pressure regulating range
- flow rate
- media
- media temperature
- ambient temperature

details needed for proportional valve

- nominal voltage
- actuation pressure range min/max

general specifications		options
ports	SPP-3 with valve body thread G 1/2 - G 3/4	without valve body
function	stepless regulation	
pressure regulation range	bar	5-100
flow rate	m ³ /h	max. 6,0
media	gaseous - liquid - highly viscous - contaminated	
abrasive media	version available	
flow direction	A ⇌ B	as marked
settling time	ms	< 200
media temperature	°C	0 to +60
ambient temperature	°C	0 to +50
approvals		
mounting	mounting holes	
weight	kg	4,8 3,7
additional equipment		


electrical specifications		options
nominal voltage	U _B	DC 24 V (max. residual ripple 10 %)
current consumption	DC	< 0,7 A
control signals	U _E	0-10 V (R _E 10 KΩ)
protection	IP65 (P54)	acc. DIN 40050
energized duty rating	ED	100 % (observe the connection conditions accordingly)
connection	plug with 7 contacts / wire diameter 6-8 mm	

pneumatic specifications		options
actuation pressure range	bar	see actuation pressure-diagram
compressed air	DIN ISO 8573-1 grade of compressed air quality 5/4/3	
control	by 3/2 way proportional valve	
actuator ports	1	G 1/8

The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

connection plan



connection conditions

When supplying the electrical set point signal to the proportional valve, the actuating air must already be present. (see actuation pressure-diagram).



position of installation

arbitrarily, but regulator not downwards.

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

type SPP-3 15 PC

drilling design for cartridge

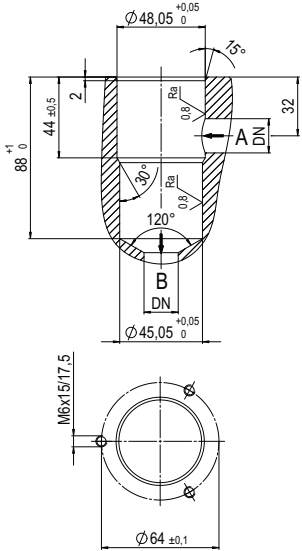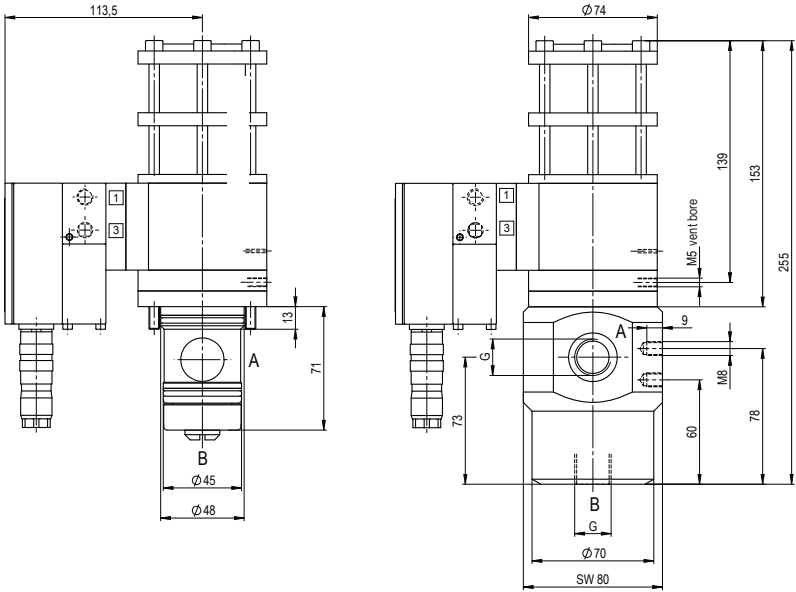

actuation pressure-diagram

